

## MOSS


Manufacturing type	Herstellingsart	Mode fabrication	Productie methode			tufted 5/32"
Construction	Structuur	Structure	Structuur			<b>structured loop pile</b>
Pile composition	Polmateriaal	Couche d'usure	Poolsamenstelling			<b>100% PA 6 - Econyl®</b>
Dye method	Farbgestaltung	Coloration	Kleurverwerking			<b>solution dyed</b>
Backing	Rückenausrüstung	Dossier	Rug			<b>bitumen with glass fibre scrim</b>
Pile weight	Poleinsatzgewicht	Poids de velour	Poolgewicht	ISO 2424	g/m2	<b>1.000</b> (+/-)
Total weight	Gesamtgewicht	Poids total	Totaal gewicht	ISO 8543	g/m2	<b>4.600</b> (+/-)
Pile height	Polhöhe	Hauteur du velours	Poolhoogte	ISO 1766	mm	<b>4,5</b> (+/-)
Total height	Gesamtdicke	Epaisseur totale	Totale dikte	ISO 1765	mm	<b>7,5</b> (+/-)
Tuft density	Noppenzahl	Nombre de touffes	Aantal punten	ISO 1763	/m2	<b>130.000</b> (+/-)
Classification	Klassifikation	Classement	Gebruiksklasse	EN 1307		<b>33</b> heavy contract
Comfort rating	Komfortklasse	Classement confort	Comfort klasse	EN 1307		<b>LC 2</b>
Castor chair	Stuhlrolleneignung	Chaise à roulettes	Rolstoelgeschikt	EN 985		<b>A</b> intensive
Dimensional stability	Dimensionstabilität	Stabilité dimensionnelle	Dimensionele stabiliteit	EN 986		<b>≤ 0,2%</b>
Fire resistance	Brennverhalten	Comportement feu	Brandgedrag	EN 13501-1		<b>Bfl-S1</b> loose laid
Permanent antistatic	Permanent Antistatisch	Antistatique permanent	Permanent antistatisch	ISO 6356	kV	<b>≤ 2,0</b>
Transversal resistance	Durchgangswiderstand	Résistance transversale	Doorgangsweerstand	ISO 10965	Ω	<b>≥ 10<sup>10</sup></b>
Thermal resistance	Wärmedurchlaßwiderstand	Résistance thermique	Warmtedoorlaatweerstand	ISO 8302	m2 K/W	<b>0,070</b>
Sound absorption	Schallabsorptionsgrad	Absorption phonique	Geluidsabsorptie	ISO 354	α <sub>w</sub>	<b>0,15</b>
Impact sound reduction	Trittschallverbesserungsmaß	Isolation phonique	Geluidsisolatie	ISO 10140	ΔL <sub>w</sub>	<b>27 dB</b>
				ISO 10140	ΔL	<b>38 dB</b> (1000 Hz)
Light fastness	Lichtechtheit	Solidité à la lumière	Lichtechtheid	ISO 105 B02		<b>≥ 8</b>
Rubbing fastness	Reibechtheit	Solidité au frottement	Wrijftechtheid	ISO 105 X12		<b>≥ 5</b> wet/dry



**ECONYL®**  
ENDLESS POSSIBILITIES

<p>manufactured by</p> <p>TAPIBEL NV Industrielaan 4 B-3900 Pelt Belgium www.tapibel.be</p>	   
<p><b>CE</b></p> <p>2018 EN 14041 DOP 000589B-001</p>	
<p><b>EN 1307</b> for use as floorcovering in buildings (EN 14041) according to the Tapibel's specification</p>	

### SHAPES

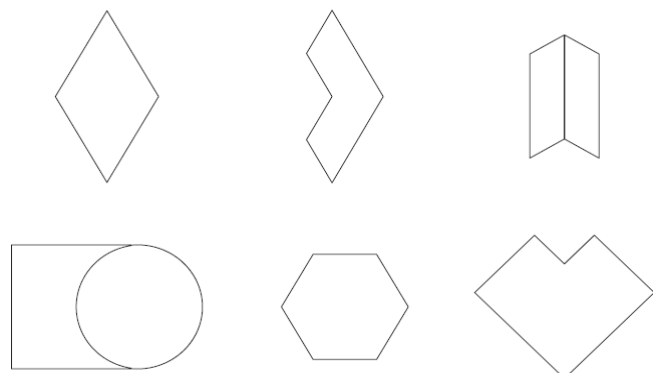

### INSTALLATION - MAINTENANCE

available on request via [info@alskar.be](mailto:info@alskar.be)

These technical details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request, if available. Tapibel reserves the right to alter specifications without notice.

Due to the method of manufacture, perfect pattern/colour matching can not always be guaranteed.

Shading/pile reversal might occur in cut pile carpets, without affecting overall quality and suitability.

It is not considered as a manufacturing fault.

ALSKAR bv  
Berg 11  
B-8980 Zonnebeke  
Belgium  
[www.alskar.be](http://www.alskar.be)